






LED-Lichtleisten doppelseitig mit Buchse

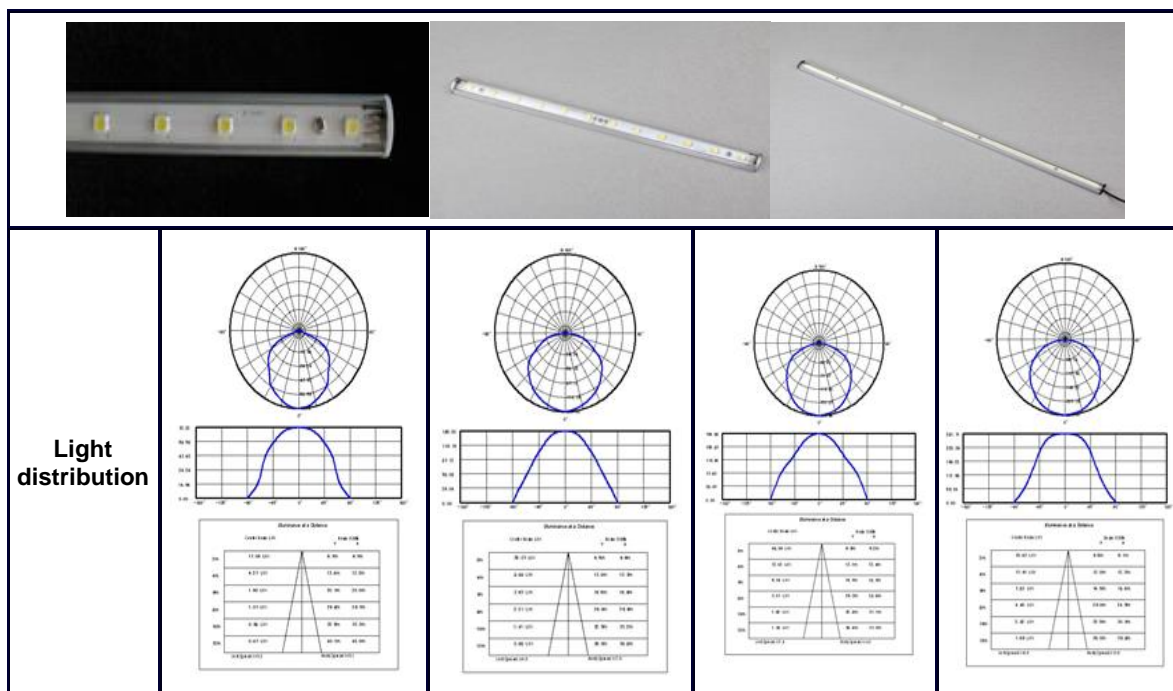

Model No.	MDZ7503-01	MDZ7506-01	MDZ7509-01	MDZ7512-01
Input Voltage (constant V)	12VDC	12VDC	12VDC	12VDC
Consumption Power	2.7W	5.4W	8.1W	10.8W
LED Type	SMD 5050	SMD 5050	SMD 5050	SMD 5050
LED Q'ty	12	24	36	48
Color	Warm White Cool White	Warm White Cool White	Warm White Cool White	Warm White Cool White
Luminous Flux	190Lm 220Lm	380Lm 440Lm	570Lm 660Lm	840Lm 920Lm
Luminous Efficacy	58 lm/W 66lm/W	58 lm/W 66lm/W	58 lm/W 66lm/W	58 lm/W 66lm/W
Correlated Color Temperature	2800-3200K 5000-5500K	2800-3200K 5000-5500K	2800-3200K 5000-5500K	2800-3200K 5000-5500K
Color Rendering Index(CRI)	> 65	> 65	> 65	> 65
Operation Temperature	-20°C~40°C	-20°C~40°C	-20°C~40°C	-20°C~40°C
Dimension	300X19X10mm<	600X19X10mm	900X19X10mm	1200X19X10mm
Beam Angle	120 degrees	120 degrees	120 degrees	120 degrees
Weight	70 g	140 g	210 g	280 g
Assessories	 45 degree bracket	 Bracket	 Linking cable	 Short Connector

